



## INYUDA OPS-M11U/M10U



### Product features


- + INTEL® Tiger Lake 10&11th Generation I3/I5/I7 Mobile Processor
- + SO-DIMM DDR4 2400/2666 RAM Max support 32GB
- + m.2 NVME Protocol SSD
- + 1\*80PIN Standard OPS socket, can add one for extra cost
- + 1\*RTL8111F Gigabit Ethernet ports
- + Support hardware one-key restore
- + Support power-on boot, scheduled boot, network wake-up, PXE

|             |                                             |                                                                                   |                                                      |
|-------------|---------------------------------------------|-----------------------------------------------------------------------------------|------------------------------------------------------|
| CPU         | CPU                                         | Support Tiger Lake I5-1135G7/1035G4 I7-1195G7 /11390H/ 1065G7 with DP+ HDMI port  |                                                      |
|             | BIOS                                        | AMI 64Mbit, Support power-on boot, scheduled boot, network wake-up, PXE, watchdog |                                                      |
| RAM         | DDR4                                        | 1*NB-DDR4 SODIMM support 2666/2400/3200MHz,Max support 32GB                       |                                                      |
| Storage     | mSATA                                       | Support m.2 SATA/ NVMe protocol hard disk, max support 1TB                        |                                                      |
| Display     | Graphics card                               | CPU integrated graphics                                                           |                                                      |
|             | Output                                      | DP                                                                                | I/O port DP output support 4096/3840*2160@30Hz       |
|             |                                             | HDMI                                                                              | I/O port HDMI output support 4096/3840*2160@30Hz     |
|             |                                             | OPS-HDMI                                                                          | 80PIN Socket HDMI output support 4096/3840*2160@60Hz |
| Audio       | Audio                                       | ALC662VD Support 1*LINE-OUT, 1*MIC-IN<br>80PIN support LINE-OUT+MIC               |                                                      |
| Internet    | LAN                                         | 2*RTL8111F 10/100/1000M RJ45 Gigabit Ethernet                                     |                                                      |
|             | WIFI                                        | M.2 socket, Detachable WIFI module                                                |                                                      |
| SIO         | FAN                                         | Support automatic fan adjustment                                                  |                                                      |
| Other       | POWER                                       | Switch button                                                                     |                                                      |
|             | RESET                                       | One key restore button                                                            |                                                      |
| USB         | USB3.1                                      | 2*USB3.1, one typeC                                                               |                                                      |
|             | USB2.0                                      | 2*USB2.0                                                                          |                                                      |
| Adapter     | Input                                       | DC12V/5A- 19V/4.74A                                                               |                                                      |
| Size        | A                                           | 180*119*30mm                                                                      |                                                      |
|             | B                                           | 195*180*30/42mm which add a subcard inside                                        |                                                      |
| Environment | Working temperature: 0-55℃ Storage: -20~70℃ |                                                                                   |                                                      |
|             | Humidity 5%~95% non-condensing              |                                                                                   |                                                      |

# Interface Demonstration

Wide range of interfaces to meet a variety of external needs

## Front interface

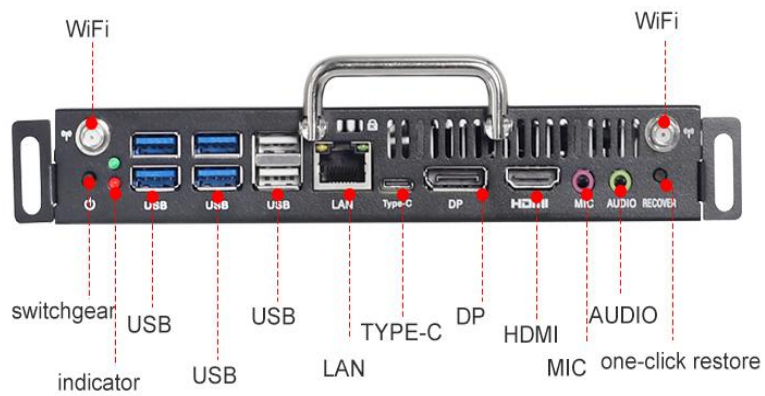

## European size

